



**UV-C**



STERYLIS LIGHT AIR 60 is a device for air disinfection in rooms where people live. The disinfection process uses UV-C technology. It is designed for flush mounting and in coffered ceilings (it corresponds to the size of a standard ceiling coffer with the total surface area of 60x60 cm).

Maximum recommended volume /  
surface area of disinfected room for  
LIGHT AIR 60 models

**60 m<sup>3</sup>**  
**20 m<sup>2</sup>**



**OPERATION:**



UV-C disinfection

**SPECIFICATION:**



	<b>LIGHT AIR 60</b>
Maximum recommended volume / surface area of room to be disinfected	60 m <sup>3</sup> 20 m <sup>2</sup>
Average UV-C dose	58 J/m <sup>2</sup>
Fan capacity- UV-C disinfection mode	60 m <sup>3</sup> /h
Noise level - UV-C disinfection mode	35 dB
Number of UV-C sources	2
Type of UV-C sources	25W T8 G13 254nm
Durability of UV-C sources	10800 h
Total electrical power of UV-C sources	50 W
Total radiant power of UV-C sources	16,4 W
Power supply	230 VAC / 50 Hz
Rated current	0,24 A
Rated electrical power	53 W
Fan type	axial
Quantity / Electric power of all fans	1 / 2 W
Dimensions (L x W x D)	595x595x85 mm
Net weight	5,6 kg
Power cord	1,0 m

Housing type	metal, powder-coated
Additional functions	fault detection and signalling (fan, UV-C lamp) counting and indication of operating time of UV-C lamps
Optional installation method*	flush-mounted
Certificates / approvals	CE, ISO

\* - versions available after consultation with our sales department

## DIMENSIONS:

MODEL	DIMENSIONS			WEIGHT
	L [mm]	W [mm]	H [mm]	[kg]
LIGHT AIR 60	595	595	85	5,6

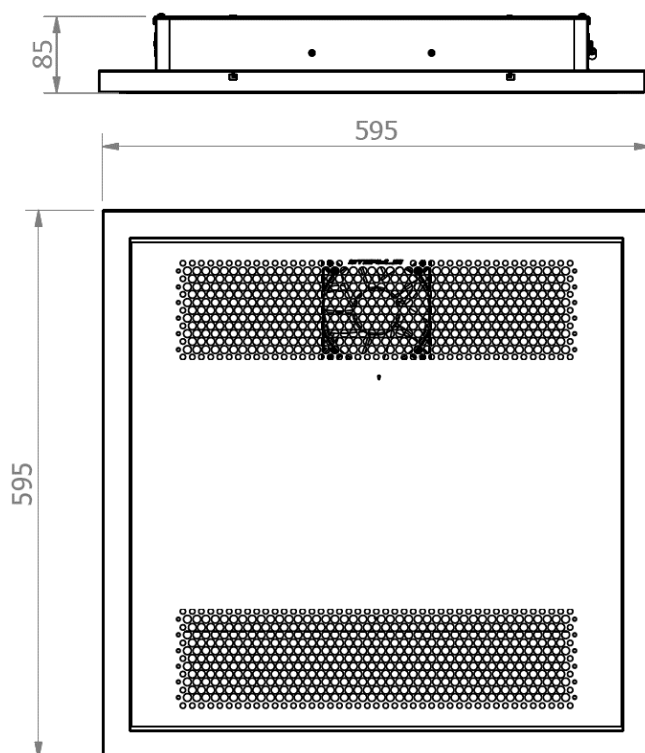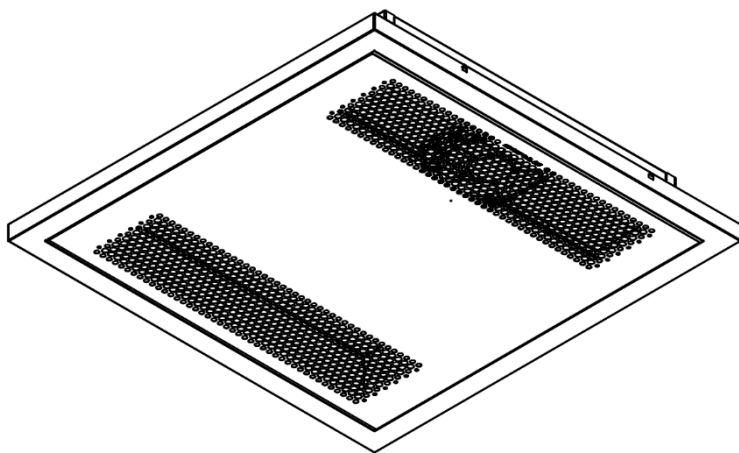

Due to continuous product development, we reserve the right to make design changes to the devices and update parameters.

Revision date : 13.05.2021