



UV-C



STERYLIS LIGHT AIR 60 is a device for air disinfection in rooms where people live. The disinfection process uses UV-C technology. It is designed for both flush and surface mounting in coffered ceilings (it corresponds to the size of a standard ceiling coffer with the total surface area of 60x60 cm).

Maximum recommended volume /
surface area of disinfected room for
LIGHT AIR 60 models

60 m³
20 m²



OPERATION:



UV-C disinfection

SPECIFICATION:

	LIGHT AIR 60
Maximum recommended volume / surface area of room to be disinfected	60 m ³ 20 m ²
Average UV-C dose	58 J/m ²
Fan capacity- UV-C disinfection mode	90 m ³ /h
Noise level - UV-C disinfection mode	35 dB
Number of UV-C sources	2
Type of UV-C sources	25W T8 G13 254nm
Durability of UV-C sources	10800 h
Total electrical power of UV-C sources	50 W
Total radiant power of UV-C sources	16,4 W
Power supply	230 VAC / 50 Hz
Rated current	0,23 A
Rated electrical power	52 W
Fan type	axial
Fan electrical power	2 W
Dimensions (L x W x D)	595x595x83 mm
Net weight	5,2 kg
Power cord	1,0 m
Housing type	metal, powder-coated

Additional functions

fault detection and signalling (fan, UV-C lamp)
counting and indication of operating time of UV-C lamps
timer / delayed shut-off

Optional installation method*

flush-mounted / surface-mounted




Certificates / approvals

CE, ISO

* - versions available after consultation with our sales department

DIMENSIONS:

MODEL	DIMENSIONS			WEIGHT
	L [mm]	W [mm]	H [mm]	
LIGHT AIR 60	595	595	83	5,2

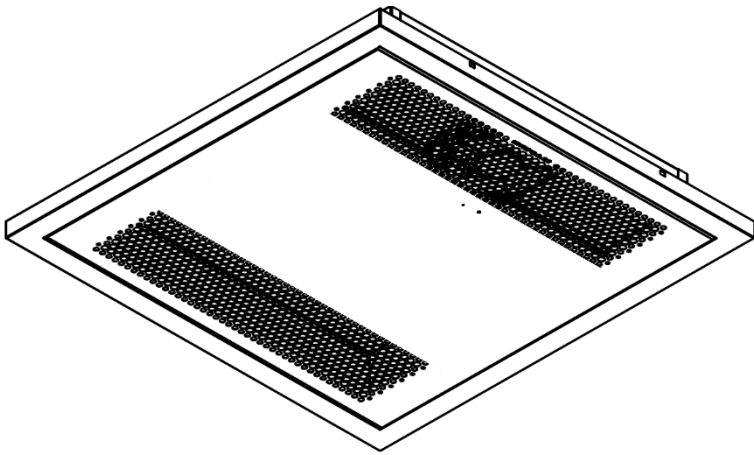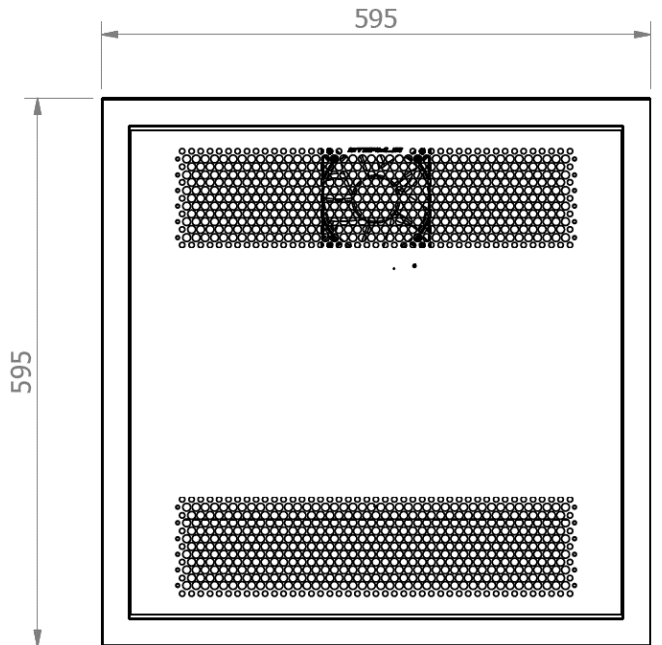

Due to continuous product development, we reserve the right to make design changes to the devices and update parameters.

Revision date : 19.02. 2021