



STERYLIS LIGHT AIR+ 60 is a 2-in-1 device combining the function of air disinfection (UV-C technology) and room illumination with LED light sources. It is designed for both flush and surface mounting in coffered ceilings (corresponds to the size of a standard 60x60cm coffer).

Maximum recommended volume /
surface area of disinfected room for
LIGHT AIR +60 models

60 m³
20 m²



OPERATION:



UV-C disinfection

SPECIFICATION:


LIGHT AIR+ 60

Maximum recommended volume / surface area of room to be disinfected	60 m ³ 20 m ²
Average UV-C dose	58 J/m ²
Fan capacity- UV-C disinfection mode	90 m ³ /h
Noise level - UV-C disinfection mode	35 dB
Number of UV-C sources	2
Type of UV-C sources	25W T8 G13 254nm
Durability of UV-C sources	10800 h
Total electrical power of UV-C sources	50 W
Total radiant power of UV-C sources	16,4 W
Power supply	230 VAC / 50 Hz
Rated current	0,23 A
Rated electrical power	52 W
Fan type	axial
Fan electrical power	2 W
Built-in LED fixture	YES
LED fixture power	30 W
LED total flux	Diffusive - 3500 lm / Microprismatic 3000 lm
Light colour	4000K / CRI80
Shade type	Diffusive / Microprismatic (PMMA)

Dimensions (L x W x D)	595x595x83 mm
Net weight	5,4 kg
Power cord	1,0 m
Housing type	metal, powder-coated
Additional functions	fault detection and signalling (fan, UV-C lamp) counting and indication of operating time of UV-C lamps timer / delayed shut-off
Optional installation method *	flush-mounted / surface-mounted
Certificates / approvals	CE, ISO

* - versions available after consultation with our sales department



PHOTOMETRY OF THE DEVICE WITH LED FIXTURE:

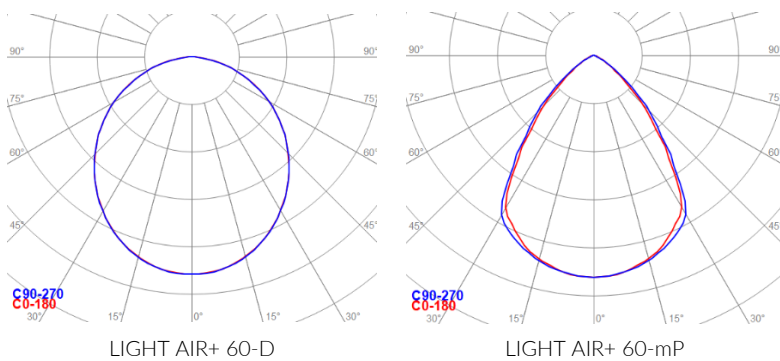

DIMENSIONS:

MODEL	DIMENSIONS			WEIGHT
	L [mm]	W [mm]	H [mm]	
LIGHT AIR+ 60	595	595	83	5,4

C

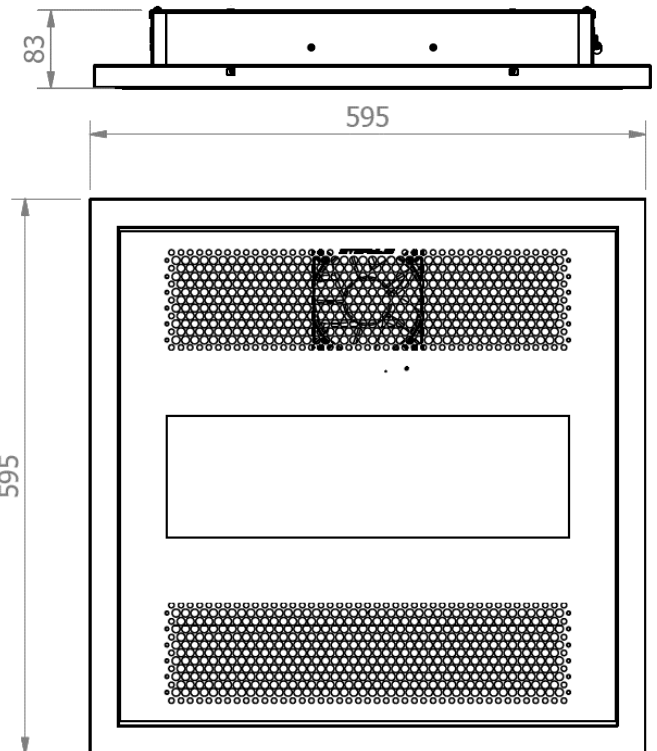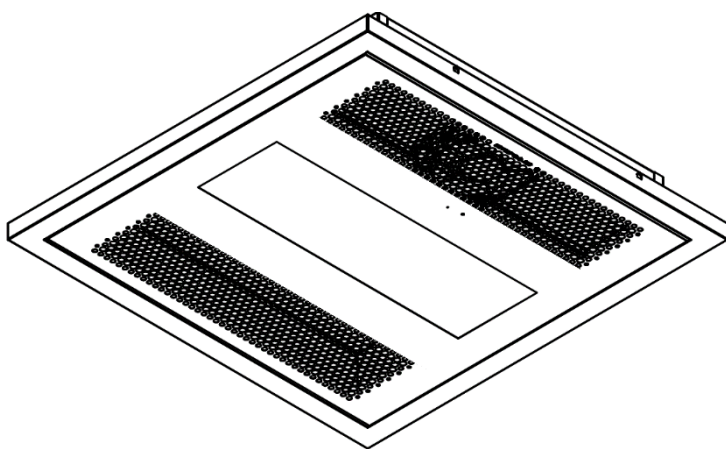

Due to continuous product development, we reserve the right to make design changes to the devices and update parameters

Revision date : 03.02..2021